


**ARTICLE NUMBER 1839-88531**

MULTILINE E





**Adaptor M8 male / M12 female 4-pole**


Adaptor M8/M12  
configuration 1,2,3,4  
fits to electrical insert  
1830-A6B050000001

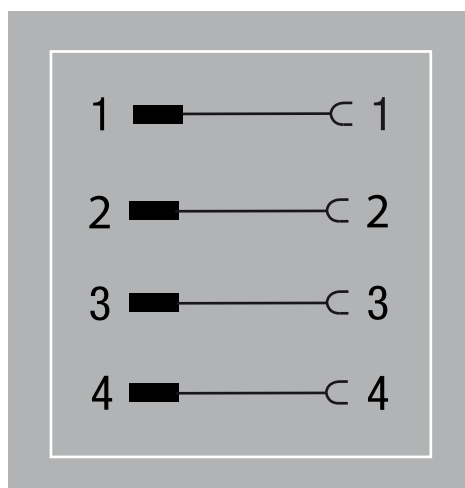

**Male**

**Female**



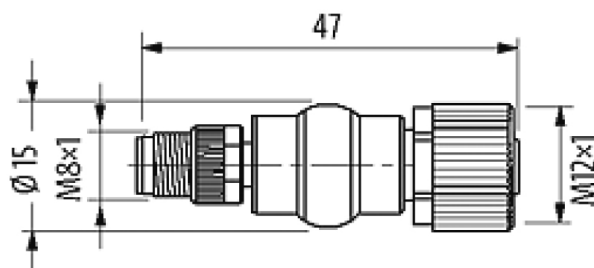

### General data

Temperature range	-25 to +85 °C
Rated impuls voltage	1,5 kV
Mounting method	inserted, tightened

### Technical data

Operating voltage	max. 50 V AC / 60 V DC
Operating current per contact	max. 4 A
Number of poles	4
Coding	A-coded
Locking of ports	screw thread M8/M12 x 1 mm (recommended torque 0,4/0,6 Nm), self-securing
Compression gland	M8, M12
Protection	IP67 when inserted and tightened (EN 60529)
Material group	Category I according to IEC 60664-1
Material (locking)	Zinc die casting, matt nickel-plated
Material	PUR

### Commercial data

Minimum order quantity	1
Country of origin	DE